
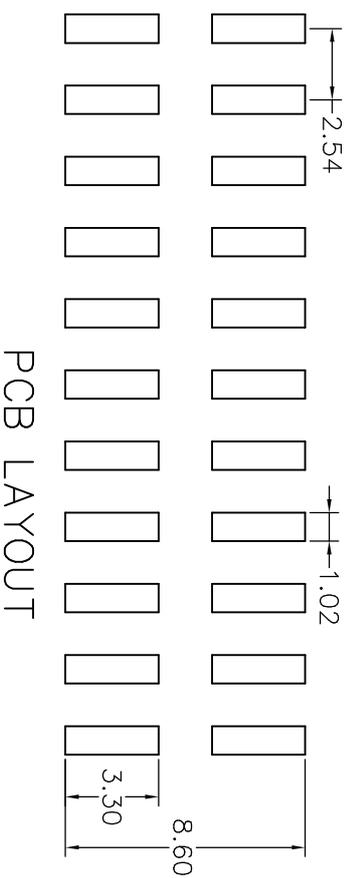

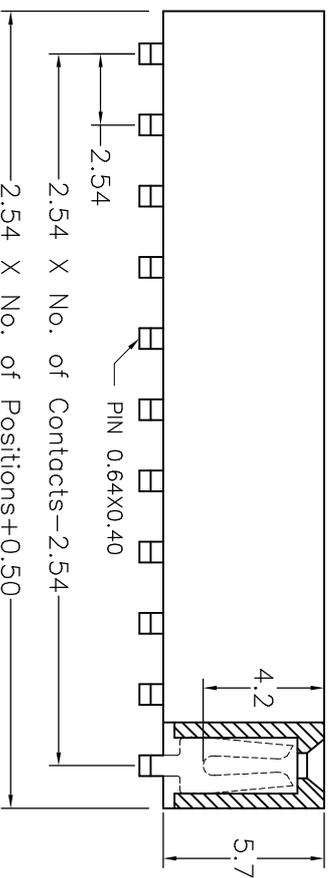


2.54mm Female Header, Dual Row, S.M.T

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40°C to +105°C
 Contact Resistance : 20m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester(UL94V-0)
 Standard: Nylon-6
 Contact Material : Phosphor bronze
 Contact plating : Au or Sn over 50u” Ni

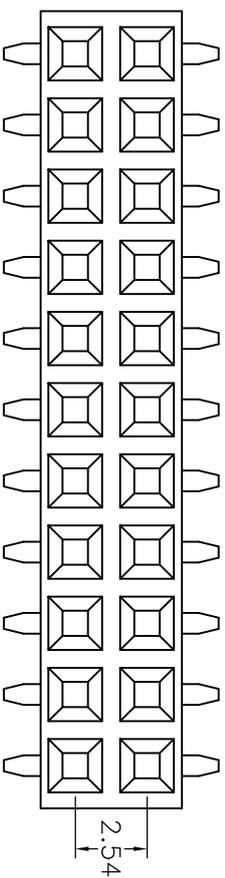

PCB LAYOUT

XYFWCN

未注公差	X: ±0.35 X.X: ±0.25 X.XX: ±0.20 X.XXX: ±0.15	品名规格	FH2.54*5.7 双排 SMT PA6T		
Size: A4	UNIT: mm	客户品号	版本	制图	审核
Scale: 1:1			A/0	易红	王策
					核准
					日期
					2008-6-28