
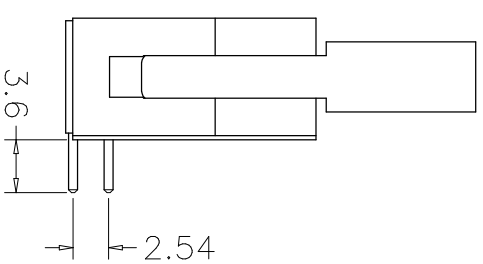


2.54mm Ejector Header, Right Angle

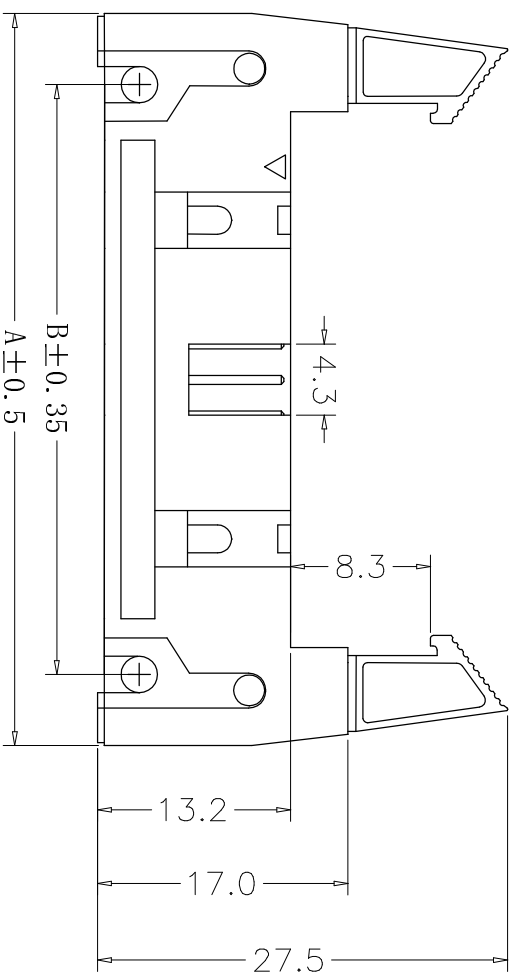

SPECIFICATIONS

Current Rating : 3AMP

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Resistance : 20mΩ Max.

Insulation Resistance: 1000M Ω Min.

Withstanding Voltage : AC 1000V

Insulator Material	: Polyester(UL94V-0)
--------------------	----------------------

Standard: PB T or


PA6T

Contact Material : Brass

Contact plating : Au or Sn over 50μ"

 $\underline{z}.$

No. of Contacts	A	B	C
10	32.00	21.84	10.16
14	37.08	26.92	15.24
16	39.62	29.46	17.78
20	44.70	34.54	22.86
26	52.32	42.16	30.48
30	57.40	47.24	35.56
34	62.48	52.32	40.64
40	70.10	59.94	48.26
50	82.80	72.64	60.96
60	95.50	85.34	73.66
64	100.58	90.42	78.74

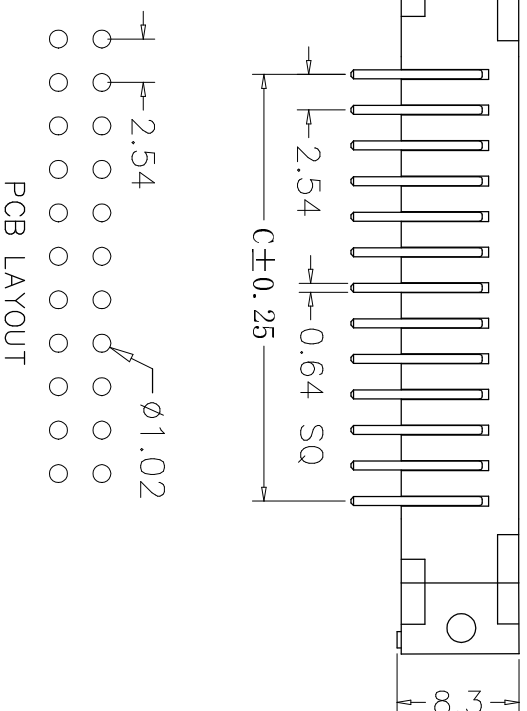

XYFWCN

未注公差	X: ± 0.35	品名规格	2.54 牛角 90度 长耳			
	X.X: ± 0.25					
	X.XX: ± 0.20					
	X.XXX: ± 0.15	客户品号				
Size: A4	UNIT: mm	版本	制图	审核	核准	日期
Scale: 1:1		A/0	易红	王笑		2008-9-9