



# 2.54mm Pin Header, Dual Row Right Angle

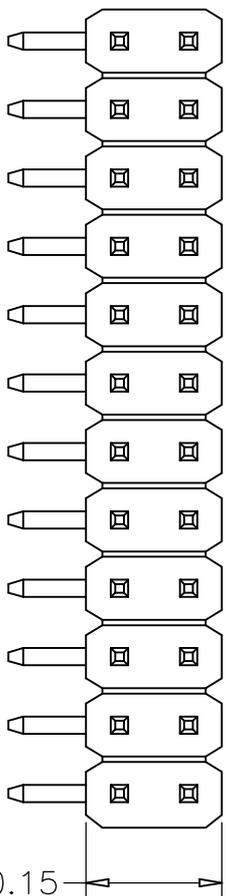

5.0 ± 0.15

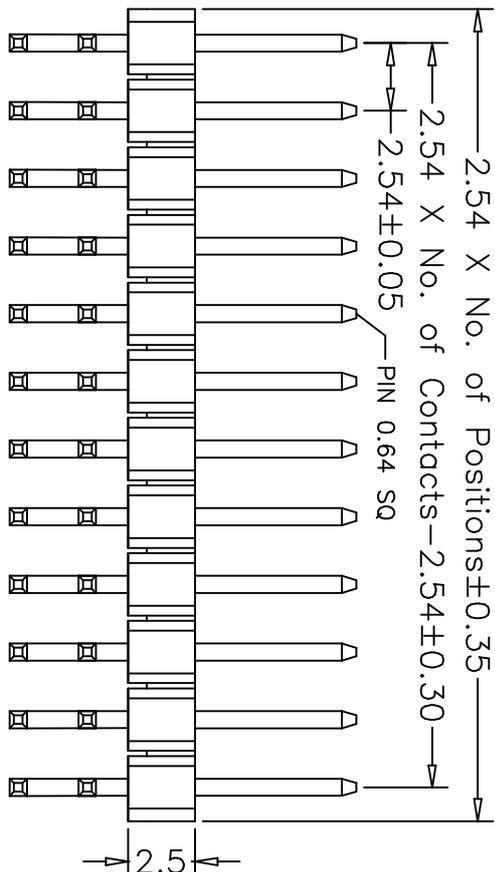


2.54 X No. of Contacts ± 0.35

2.54 ± 0.05

PIN 0.64 sq

2.5

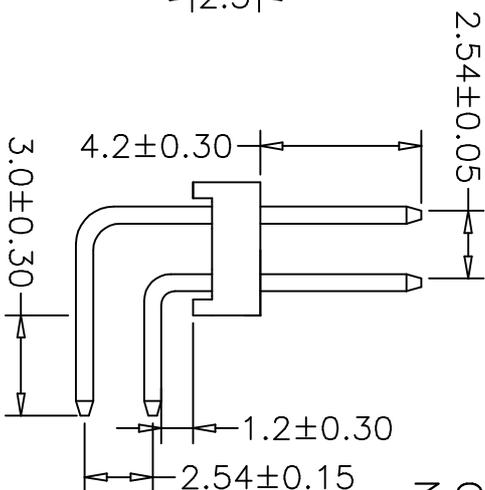


2.54 ± 0.05

4.2 ± 0.30

1.2 ± 0.30

2.54 ± 0.15

3.0 ± 0.30

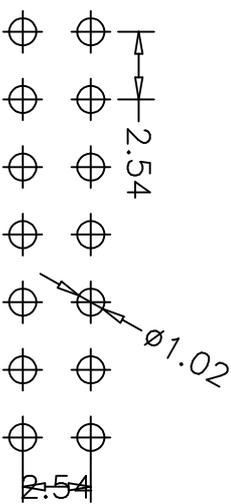

PCB LAYOUT

## SPECIFICATIONS

Current Rating : 3AMP  
 Operation Temperature: -40°C to +105°C  
 Contact Resistance : 20m Ω Max.  
 Insulation Resistance: 1000M Ω Min.  
 Withstanding Voltage : AC 1000V  
 Insulator Material : Polyester(UL94V-0)  
 Standard: PBT

Contact Material : Brass  
 Contact plating : Au or Sn over 50μ Ni

# XYFWGN

未注公差		X: ±0.35	品名规格	PH2.54 双排 L=12.0/3.0(1.2)/6.0/17.0 90度		
公差		X.X: ±0.25	客户品号			
Size: A4		X.XX: ±0.20	版本	制图	审核	核 准
Scale: 1:1		X.XXX: ±0.15	A/0	易红	王笑	日期
						2008-9-9