1.27mm BOX Header S.M.T H=9.9m/r

SPECIFICATIONS

Current Rating :1AMP


Operation Temperature: -40°C to+105°C Contact Resistance : $20\text{m}\,\Omega$ Max. Insulation Resistance: $1000\text{M}\,\Omega$ Min. Withstanding Voltage : AC 500V


Insulator Material :Polyester(UL94V-0)


Standard: LCP


Contact Material :Brass

Contact plating : Au or Sn over 50u" Ni

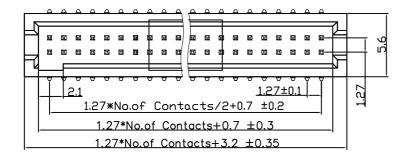

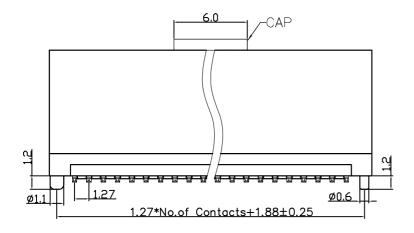





P.C.B Layout

XYFWCN	未 注	X: ± 0. X. X: ±		묘	占名规格	BOX1.2	7*9.0	双排 带力	大小柱 CAF	\$M
	公差	X. XX: X. XXX	±0.20 :±0.1	客户品号						
	Siz	e:A4	UNIT:mm		版本	制图	审核	核准	日期	
	Sca	le:1:1	♦ ∈	-	A/0	易红	王笑		2011. 3. 21	